



دستورالعمل اپلیکیشن مدیریت قفل هوشمند صندوق نسوز سدید



برای دریافت نرم افزار
بارکد را اسکن کنید.



خدمات پس از فروش

ت ۰۲۱-۹۱۳۰۳۷۱۳ (۱۹۴)

☎ ۰۹۳۳۸۶۱۹۱۱۹

☎ ۰۹۱۰۸۶۱۹۱۹۱

🌐 www.sadidsafe.com

راه اندازی بخش وای فای



و مدیریت قفل هوشمند سدید

دکمه اتصال به نرم افزار توپا

۱- محل قرار گیری دکمه قرمز رنگ اتصال به نرم افزار در سری محصولات با قفل FT (۰-۱)

۲- محل قرار گیری دکمه قرمز رنگ اتصال به نرم افزار در سری محصولات با قفل

LF (۰-۲)

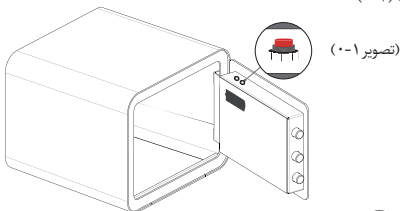


۱- تنظیم شبکه

مرحله ۱) اپلیکیشن Tuya Smart را در App Store و یا Google Play و یا مایکت به فارسی یا انگلیسی جستجو نموده و یا با اسکن کیو آر کد موجود روی جلد دفترچه و بر روی برچسب کنار محفظه باتری، اقدام به نصب نرم افزار نمایید. (تصویر ۱-۱).




(تصویر ۱-۱)



مرحله ۲) از طریق گزینه Log in وارد برنامه می شوید. چنانچه قبلا وارد برنامه شده اید و اکانت دارید از طریق گزینه Sign Up وارد می شوید. (تصویر ۲-۱)


(تصویر ۲-۱)

مرحله ۳) در این قسمت ایمیل و پسورد خود را وارد کرده و تیک قسمت... I agree را میزنیم و بعد روی گزینه Log in کلیک می کنیم و وارد برنامه می شویم. همچنین قادر خواهید بود تا با کلیک بر روی آیکن گوگل موجود در پایین صفحه و با استفاده از جیمیل و گوگل اکانت خود نیز وارد برنامه شوید. (تصویر ۱-۳)



تصویر ۱-۳

۴) چنانچه از قبل وارد برنامه شده اید بعد از زدن گزینه Sign Up ایمیل خود را همراه با پسوردی که از قبل در برنامه تعریف کردید را وارد می کنید.



مرحله ۴) بعد از وارد کردن اطلاعات مورد نظر وارد برنامه خواهید شد. در این قسمت در سمت راست بالایی صفحه روی **گزینه +** کلیک کرده و گزینه **Add Device** را انتخاب می کنیم. (تصویر ۱-۴)

تصویر ۱-۴

مرحله ۵) بعد از وارد شدن به این صفحه، دکمه قرمز روی صندوق را به مدت ۵ ثانیه نگه دارید صدای بوق از قفل شنیده خواهد شد و یا لوگو دایره شکل  روشن خواهد شد. (مخصوص گاو صندوق) و یا تصویر قفل سبز رنگ روی نمایشگر رمز ظاهر شود (مخصوص سیف باکس). (با توجه به نوع و مدل قفل، به شماره ۱ و ۲ در بخش تصاویر ابتدای دستورالعمل مراجعه شود)

(تصویر ۱-۵)




مرحله ۶) بعد از گذشت چند ثانیه صندوق شناسایی شده و روی شکل صندوق کلیک کنید.

(تصویر ۱-۶)

مرحله ۷) در این بخش، رمز وای فای مورد

نظر که قصد اتصال به آن را دارید، وارد نمایید.



(تصویر ۱-۷)



مرحله ۸) منتظر بمانید تا نمودار دایره شکل کامل پر شود.

(تصویر ۱-۸)



مرحله ۹) گاو صندوق با موفقیت متصل شد.
(تصویر ۹-۱)

۲- معرفی قابلیت‌ها



• پس از مرحله ۱، گاو صندوق با موفقیت متصل می‌شود.

برنامه «Tuya Smart» را باز کرده و روی گزینه «Smart Safe Box» کلیک کنید (تصویر ۲-۱).

• وارد صفحه اصلی دستگاه شوید.

• پس از باز کردن گاو صندوق، پیام باز شدن درب از طریق برنامه دریافت می‌شود.

(تصویر ۲-۱)

• در صورت وارد کردن رمز عبور چندباره یا اثر انگشت اشتباه، پیام اطلاع‌رسانی از برنامه دریافت خواهید کرد.

• اگر در خانه نیستید، آیا این گاوصندوق امن است؟ ما قابلیت «آلارم خودکار» را برای حل این نگرانی ارائه کرده ایم. وقتی گاوصندوق به شدت تکان بخورد یا به آن ضربه وارد شود، هشدار با صدای بلندی فعال می‌شود. همچنین، برنامه پیام هشدار دریافت می‌کند. با استفاده از اثر انگشت یا رمز عبور صحیح، درب گاوصندوق باز شده و هشدار متوقف می‌شود.

برای فعال سازی این قابلیت، پس از لمس و روشن شدن صفحه کلید رمز، کلید مربع را فشار داده و نگه دارید تا زمانی که لوگوی چرخ دنده نمایان شده و پیام صوتی تایید فعالسازی شنیده شود.



۳- بازگشایی صندوق از راه دور (با تایید مالک)

مرحله ۱) کلید «۰۰» و سپس # را فشار دهید.
• صدای بوق از دستگاه شنیده خواهد شد.


مرحله ۲) درخواست باز کردن درب از راه دور ارسال می‌شود و برنامه «Tuya Smart» این درخواست را دریافت می‌کند (تصویر ۱-۳). متن «click remote open lock» به رنگ سفید و زرد نمایش داده می‌شود.

(تصویر ۱-۳)


مرحله ۳) روی باز کردن یا بستن گاوصندوق کلیک کنید. پس از تأیید، درب باز می‌شود. اگر لغو کنید یا هیچ اقدامی انجام ندهید، درب همچنان بسته می‌ماند.

۴- هشدار دسترسی غیر مجاز

• اگر فردی ناشناس درب را باز کند، پیام باز کردن دریافت می‌شود، وضعیت گاوصندوق را به موقع بررسی کنید تا از حوادث این چنینی جلوگیری شود.




(تصویر ۴-۱)



(تصویر ۴-۲)

۵- سایر قابلیت‌ها


- ۱- یادآوری نام گاو صندوق و حذف دستگاه
 - ۲- نمایش میزان باتری
 - ۳- نشانگر قفل
 - ۴- نمایش آخرین پیام
 - ۵- یادآوری و ثبت هشدار
 - ۶- مدیریت اعضا
 - ۷- ثبت تاریخچه باز و بسته شدن صندوق
- و سایر قابلیت‌ها




(تصویر ۱-۵)



(تصویر ۲-۵)



(تصویر ۳-۵)



(تصویر ۴-۵)


توجه:

- در صورت تغییر شبکه اینترنت متصل به صندوق، دستگاه را حذف کرده و دوباره تنظیمات شبکه را انجام دهید.
- توجه داشته باشید دستگاه حتما در شعاع سیگنال قوی وای فای و تا جای ممکن نزدیک به مودم قرار داشته باشد.
- در نظر داشته باشید تا صندوق به صورت دائم به یک اینترنت ثابت و پایدار اتصال داشته باشد.

● توجه داشته باشید در راستای دریافت اعلان (نوتیفیکیشن) در نرم افزار توپا در هنگام دور بودن از صندوق، حتما می بایستی تا تلفن همراه شما به اینترنت متصل باشد.

● همچنین در نظر داشته باشید برخی از موارد که در بخش «سایر قابلیت ها» ذکر شده است، با پرداخت هزینه درون برنامه ای نرم افزار به صورت دلاری، قابل فعال سازی و استفاده خواهند بود.

- Please be advise you need to stay connected or have access to internet connection to receive the Tuya app notifications in case that you are not cloe to the safe.
- **Note that some features listed under “Other Features” may require in-app purchases to activate and use.**




(Image 5-4)


Attention:

- If the network environment changes, remove the device and repeat the network setup process.
- Make sure the device is always within strong Wi-Fi signal range and as close to the modem as possible.
- Please make sure the safe remains connected to a stable Wifi or internet feed.


1. Safe name reminder and device removal.
 2. Battery level display.
 3. Lock status indicator.
 4. Display of the latest notifications.
 5. Alarm reminder and log.
 6. Family member management.
 7. Log of safe opening/closing history.
- and Additional and features.



(Image 5-1)



(Image 5-2)



(Image 5-3)

Smart" app will receive it (Image 3-2). The text "Click remote open lock" will be displayed in white and yellow.


Step 3) Click to open or close the safe. Once confirmed, the door opens. If canceled or left unattended, the door remains closed.

4. Unauthorized Access Warning

If an unknown person opens the safe, a notification will be received. Check the safe's status promptly to prevent such incidents.



(Image 4-2)



(Image 4-1)

5. Other Features

- When the safe door is opened, a notification is received through the app.
- If the password or fingerprint is entered incorrectly multiple times, a reminder notification will be sent from the app.
- Concerned about security when you're not at home? We've provided the **"Automatic Alarm"** feature. When the safe is shaken

violently or receives a heavy impact, the alarm is triggered with a loud sound, and a warning message is sent to the app. The alarm stops when the safe is opened with the correct fingerprint or password.

To activate this feature, after tapping and turning on the keypad, press and hold the square key until the gear icon appears and the activation confirmation voice message is heard.


3. Remote Access / Unlock (upon safe owner's approval)

Step 1) Press the "00#" key. The Wi-Fi indicator will start blinking.



(Image 2-1)

Step 2) A remote unlocking request will be sent, and the "Tuya




Step 9) The safe is now successfully connected (Image 1-9).

(Image 1-9)


2. Feature Introduction

- After step 1, the safe is successfully connected. Open the "Tuya Smart" app and click on "Smart Safe Box." (Image 2-1).



(Image 2-1)

- You will enter the device's main page.




Step7) In this section, enter the Wi-Fi password of the network you want to connect to. (Image1-7).

(Image 1-7)

Step 8) Wait until the circular progress chart is fully loaded. (Image1-8).



(Image 1-8)




Step 5) After entering this page, press and hold the red button on the safe for 5 seconds until you hear a beep sound from the lock or the  icon will be shown on the lock based on it's type (for safes) or until the green lock icon appears on the digital keypad display (for safe boxes). (Depending on the type and model of the lock, refer to numbers 1 and 2 in the image section at the beginning of the instructions.)

(Image 1-5)

Step 6) After a few seconds, the safe will be detected. Click on the safe icon. (Image 1-6).



(Image 1-6)



Step 3) Enter your email and password, check the “I agree...” box, and click on “Log in” to access the app.

If you already registered before, after selecting “Sign Up,” enter the email and password previously defined.* You can also sign in by clicking the Google icon at the bottom of the page and using your Gmail or Google account. (Image 1-3).

(Image1-3)

Step 4) Once logged in, click the “+” button at the top right corner of the page and select “Add Device.” (Image 1-4).



(Image 1-4)


1. Network Setup

Step 1) Search for the "Tuya Smart" application in the App Store, Google Play or Myket (in Persian or English) and download it you are also able to install the app via scanning the QR Code on the cover page of the user manual or the printed QR Code on the label located next to the battery compartment. (Image 1-1).



(Image 1-1)

Step 2) Enter the app through the "Log in" option. If you already have an account, use "Sign Up" to enter. (Image 1-2).





(Image 1-2)

Sadid Smart Lock

Wi-Fi Setup and Management

Tuya App Connection Button Placement

1. Location of the red connection button to the application in FT series products. (Image 0-1)
2. Location of the red connection button to the application in LF series products. (Image 0-2)

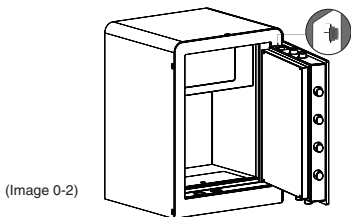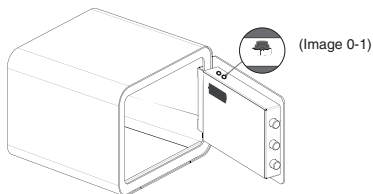



Sadid Safe Smart Lock Management Application User Manual

V 06/6



Scan the QR Code to
Download The App.



Customer Services

☎ 021-91303713(194)

📱 09338619119

📱 09108619191

🌐 www.sadidsafe.com